


Jeep 4-Cylinder F-Head "HURRICANE" ENGINE

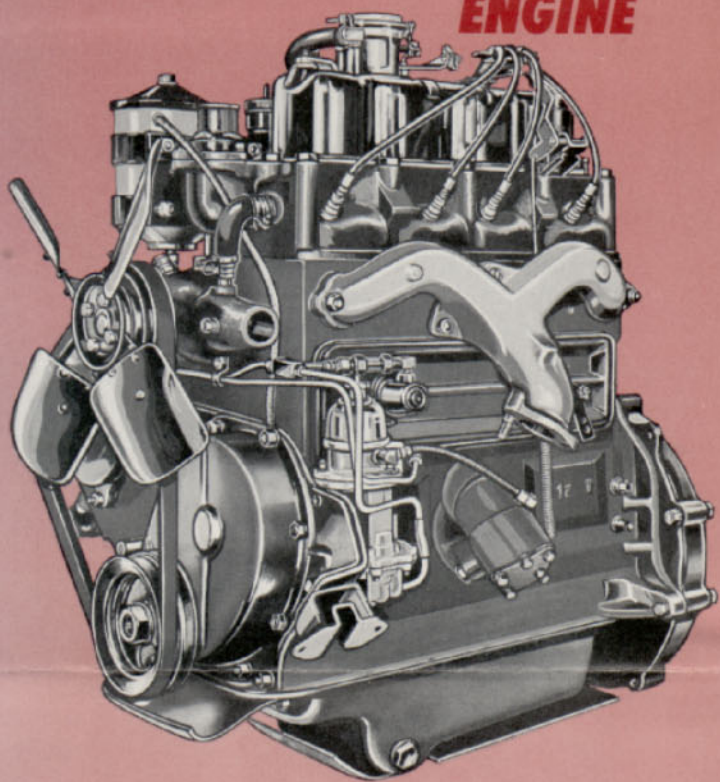

IT'S GOT "HURRICANE" HUSTLE UNDER THE HOOD


The 'Jeep' CJ-3B is powered by the world-famous 'Jeep' 4-cylinder, F-Head "Hurricane" engine to give you rugged performance and thrift. The "Hurricane" features positive exhaust valve rotation and aluminum alloy pistons to increase its life span. Gives you economical mileage and more maintenance-free service, too.

At 4000 R.P.M., the "Hurricane" develops 75 H.P.; 114 lbs. ft. torque are developed at 2000 R.P.M. with a displacement of 134.2 cu. in. The "Hurricane" makes economical use of regular gasoline, responds instantly.

KAISER Jeep CORPORATION • TOLEDO 1, OHIO
 WORLD'S LARGEST AND MOST EXPERIENCED
 MANUFACTURER OF 4-WHEEL DRIVE VEHICLES

DISTRIBUTED BY:
KAISER Jeep SALES CORPORATION • TOLEDO 1, OHIO
KAISER Jeep INTERNATIONAL CORPORATION • TOLEDO 1, OHIO
KAISER Jeep OVERSEAS S. A. • ZUG, SWITZERLAND
KAISER Jeep OF CANADA LTD. • WINDSOR, ONTARIO

Jeep UNIVERSAL MODEL CJ-3B

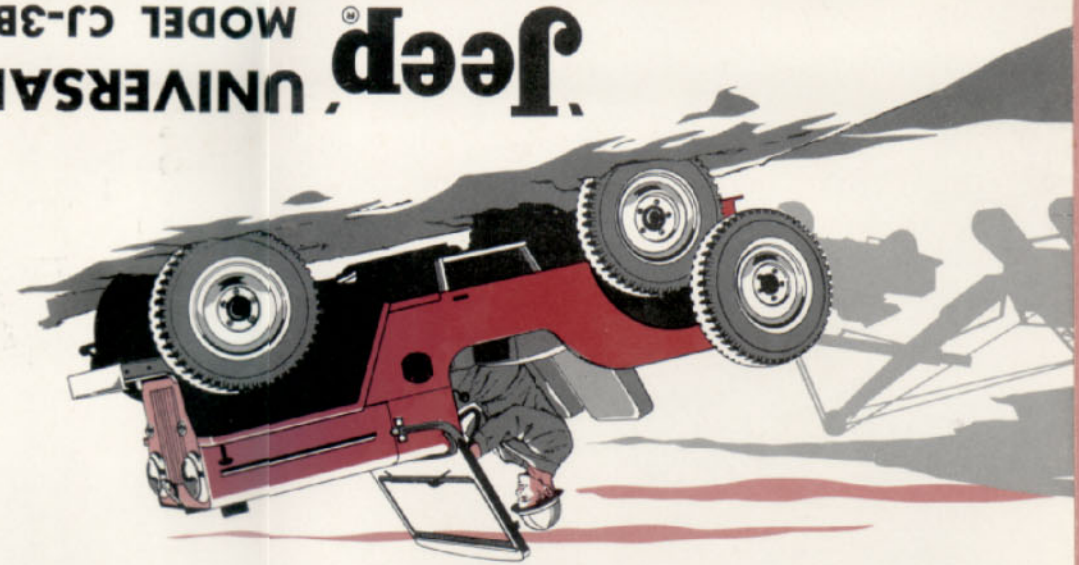

SPECIFICATIONS OF THE 4-WHEEL DRIVE 'JEEP' UNIVERSAL MODEL CJ-3B

(Specifications Subject to Change Without Notice)


G.V.W...... 3500 lbs. **WHEELBASE**..... 80.06 in.
OVERALL LENGTH 129.88 in. **OVERALL WIDTH** 68.88 in.
TREAD..... 48.44 in. **OVERALL HEIGHT** 67.75 in.
AXLES—Type: Hypoid, full-floating front, semi-floating rear. Ratios: 4.27:1. (5.38:1 optional). Capacities: Front, 2000 lbs.; Rear, 2500 lbs.
BRAKES—Service: Bendix hydraulic, 9 in. drum diameter, 117.8 sq. in. total effective area.
CLUTCH—Single, dry plate with torsional damping, 72 sq. in. area.
COOLING—Cellular, 11 qts., 12 qts. with heater.
ELECTRICAL—Battery: 50 Amp. Hour, 12-volt (6-volt optional). Generator: 35 Amp. Capacity.
ENGINE—"Hurricane"—4-Cyl. F-Head, 2-in. intake valves in head, exhaust valves in block. Bore and stroke 3 1/8 in. x 4 3/8 in. Displacement 134.2 cu. in. Max. H.P. 75 @ 4000 R.P.M., Taxable

H.P. 15.63. Torque 114 lbs. ft. @ 2000 R.P.M. Compression ratio 7.4:1 (6.9:1 optional).
FRAME—Heavy steel channel sides with 6 cross members.
FUEL TANK—Capacity: 10 1/2 gallons.
SHOCK ABSORBERS—Direct acting, hydraulic.
SPRINGS—Semi-elliptical leaf type. Front: 36.25 in. x 1.75 in., 10 leaves, Rate 260 lb./in. Rear: 42 in. x 1.75 in., 9 leaves, Rate 190 lb./in.
STEERING—Cam and lever, overall ratio 17.9:1.
TIRES—6.00 x 16 (4-ply) Other sizes optional.
TRANSFER CASE—2 speeds, 1.00:1; 2.46:1.
TRANSMISSION—3-speed syncromesh. Ratios: 1st—3.339:1; 2nd—1.551:1; 3rd—1.000:1; Reverse—3.798:1.
WEIGHT, CURB—2243 lbs.
WHEELS—5 disc type, 4.50 x 16, 5 stud.

VERSATILITY

means the complete line of economical 'Jeep' 2 and 4-wheel drive vehicles.

Choose your model from this reliable 'Jeep' vehicle line. See your experienced 'Jeep' dealer soon.

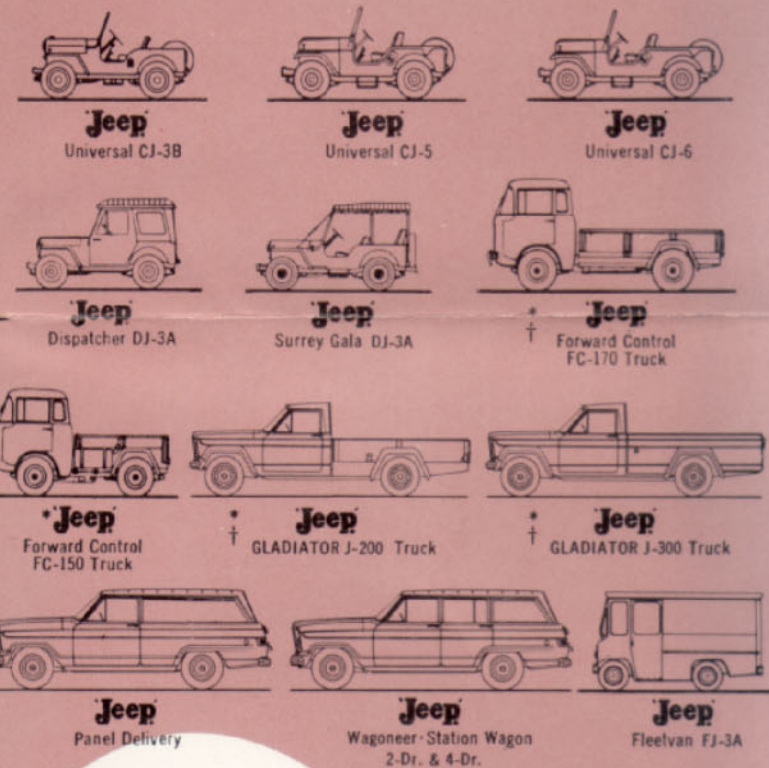

*Stake model available.
 †Dual rear wheel platform stake model available.